


## MGB-L1HB-PNA-L-121862 (ORDER NO. 121862)

Locking set MGB-L1...-PN... (guard locking by spring force) with 3 control elements, 7/8" and M12 plugs

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850, illuminated
- ▶ 2 illuminated pushbuttons
- ▶ including adhesive labels
- ▶ Connection via 7/8" and M12 plugs
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ Unicode

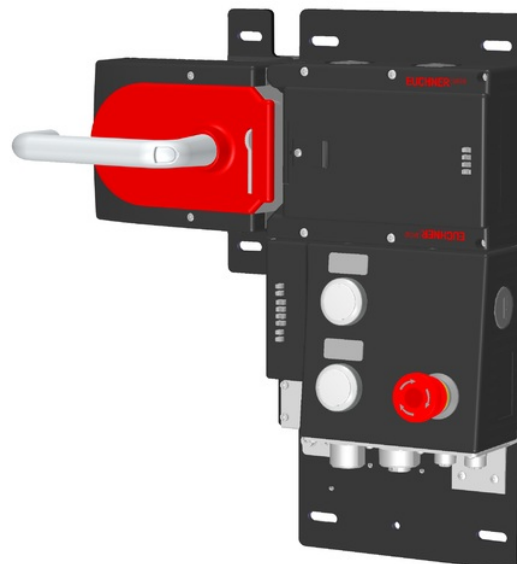

### Description

#### Profinet connection

7/8" plugs according to ANSI/B93.55M-1981 and M12 plugs (d-coded) according to IEC 61076-2-101

#### Profinet RT switch

Point-to-point topology network structure due to integrated RT switch.


#### Flexible use as interlocking or guard locking

By means of the corresponding evaluation of the safe device data by the control system, use can be as either interlocking or guard locking (with or without monitoring).

#### Illuminated emergency stop

Emergency stop with illumination that can be controlled as required.

### Dimension drawings

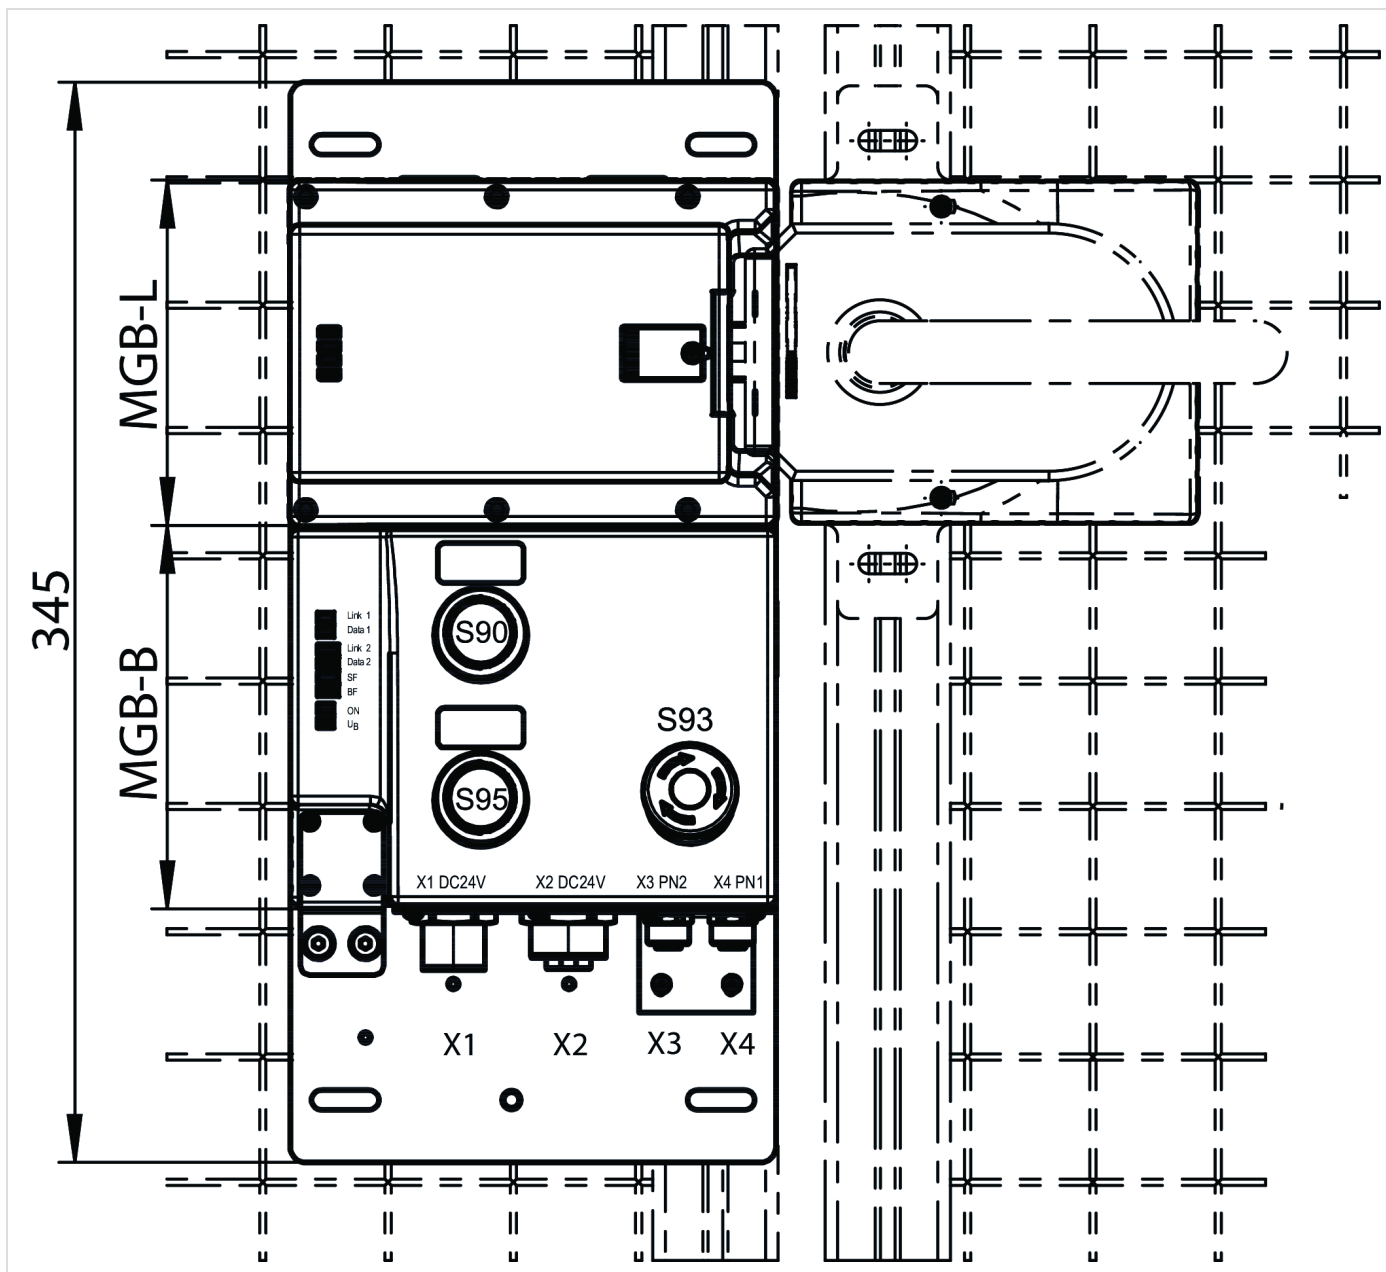

## Technical data

### Approvals



Handle modules MGB-H-AA1A2-L-106221 (Order No. 106221)



### Mechanical values and environment

Ambient temperature	-20 ... +55 °C
Degree of protection	IP65
Installation orientation	Door hinge DIN left
Material	

Housing Fiber glass reinforced plastic, nickel-plated die-cast zinc, stainless steel

## Miscellaneous

Additional feature with mounting plate

Product version number V3.0.0

## Locking modules MGB-L1B-PNA-L-121861 (Order No. 121861)

Work area



Assured release distance  $s_{ar}$

Door position max. 65 mm

## Controls and indicators

Assignment diagram

L0

B1

Item	Extras	Color	Designation1	Number	LED	Version	Einlegeschild Anmerkung	Slide-in label	Switching element
90						Illuminated pushbutton			1NO
93						Emergency stop illuminated			2 PD
95						Illuminated pushbutton			1NO

## Electrical connection ratings

## Connecting cable

	Ethernet	Profinet I/O cable, at least cat. 5e
Current consumption		max. 500 mA
Degree of contamination (external, according to EN 60947-1)		3
EMC protection requirements		In accordance with EN 61000-4 and EN 61326-3-1
maximum feed-in current in the connection block		
	X1, X2	max. 4000 mA
Rated impulse withstand voltage $U_{imp}$		0.5 kV
Rated insulation voltage $U_i$		75 V
Safety class		III
Transponder coding		Unicode
		<b>Power supply X1</b>
Auxiliary voltage DC		
	L2	24 V DC -15% ... +10% (The auxiliary voltage is not required for the MGB system)
Fusing		
	extern	min. 1 A träge
Operating voltage DC		
	L1	24 V DC -15% ... +10% ((verpolsicher, geregelt, Restwelligkeit <5%, PELV))
		<b>Power supply X2</b>
Auxiliary voltage DC		
	L2	24 V DC -15% ... +10% (For looping through for connected devices)
Operating voltage DC		
	L1	24 V DC -15% ... +10% (Zum Weiterschleifen für nachfolgende Geräte)

## Mechanical values and environment

Ambient temperature

at UB = 24V DC -20 ... +55 °C

Connection

7/8" Power  
(X2 (The document PROFINET "Cabling and Interconnection Technology" from the PNO aids in the correct selection of cables.))

7/8" Power  
(X1 (The document PROFINET "Cabling and Interconnection Technology" from the PNO aids in the correct selection of cables.))

acc. to IEC 61076-2-101, Profinet I/O cable, at least cat. 5e M12, D-coded, screened  
(X4 (The document PROFINET "Cabling and Interconnection Technology" from the PNO aids in the correct selection of cables.))

acc. to IEC 61076-2-101, Profinet I/O cable, at least cat. 5e M12, D-coded, screened  
(X3 (The document PROFINET "Cabling and Interconnection Technology" from the PNO aids in the correct selection of cables.))

Degree of protection

IP54

Guard locking principle

Closed-circuit current principle

Installation orientation

Door hinge DIN left

Locking force  $F_{Zh}$

2000 N

Material

Housing Fiber glass reinforced plastic, nickel-plated die-cast zinc, stainless steel

Mechanical life

$1 \times 10^6$

in case of use as door stop, and 1 Joule impact energy  $0.1 \times 10^6$

Reaction time

Emergency stop / machine stop max. 250 ms Turn-off time  
(The reaction time is the max. time between the change in the input status and the deletion of the corresponding bit in the bus protocol.)

Guard locking max. 550 ms Turn-off time  
(The reaction time is the max. time between the change in the input status and the deletion of the corresponding bit in the bus protocol.)

Bolt position max. 550 ms Turn-off time  
(The reaction time is the max. time between the change in the input status and the deletion of the corresponding bit in the bus protocol.)

Door position max. 550 ms Turn-off time  
(The reaction time is the max. time between the change in the input status and the deletion of the corresponding bit in the bus protocol.)

Shock and vibration resistance

according to EN 60947-5-3

Switching frequency

0.25 Hz

Reliability values according to EN ISO 13849-1

Mission time	20 y
Safety Integrity Level	SIL 3 (EN 62061:2005)
<b>Control of guard locking</b>	
Category	4
Performance Level	PL e
PFHd	3.91 x 10 <sup>-8</sup>
<b>Emergency stop</b>	
B10d	
Emergency stop	0.13 x 10 <sup>6</sup>
<b>Emergency-stop evaluation</b>	
Category	4
Performance Level	PL e
PFHd	4.1 x 10 <sup>-8</sup>
<b>Monitoring of guard locking and the guard position</b>	
Category	4
Diagnostic Coverage (DC)	99 %
Performance Level	PL e
PFHd	4.07 x 10 <sup>-8</sup> (Fixed failure rate without consideration of faults in wearing parts.)

## Miscellaneous

Additional feature	incl. lens set ID no. 120344	
Product version number	V3.30.10	
Slide-in label		
<b>Anzahl</b>	<b>Beschriftung</b>	<b>Anmerkung</b>
2		ohne Aufschrift

## Interface, bus

Bus data protocol	Profinet (IEC 61158 type 10)
Data interface	Ethernet
Safety data protocol	Profisafe (IEC 61784-3-3)

## Components



**121861**  
MGB-L1B-PNA-L-121861  
Evaluation module and bus module  
MGB-L1...-PN... (guard locking by  
spring force) with 3 control elements,  
7/8" and M12 plugs

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850, illuminated
- ▶ 2 illuminated pushbuttons
- ▶ including adhesive labels
- ▶ Connection via 7/8" and M12 plugs
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ Unicode
- ▶ Intelligent bolt tongue
- ▶ Lockout bar
- ▶ Door handle
- ▶ Mounting plate



**106221**  
MGB-H-AA1A2-L-106221  
Handle module MGB-H-...

## Accessories

### Function expansion

## Emergency release for safety system MGB

---



**112989**  
MGB-A-EMERGENCYRELEASE-  
112989

- ▶ Quick emergency release
- ▶ sealable

## Escape release module MGB-E... pre-assembled on mounting plate

---



**106051**  
MGB-E-A2-106051

- ▶ Escape release from the danger zone
- ▶ Mounted on mounting plate
- ▶ With red handle
- ▶ 115 mm long

## Miscellaneous

### Adhesive labels

---

**114529**  
MGB-A-PLATESET-NN01-114529

- ▶ Adhesive labels suitable for MGB evaluation modules, bus modules and control modules
- ▶ silver, blank
- ▶ Packaging unit = 10 pcs.

### Lens set labeled

---



**126158**  
AY-SET-LNS-SY03-126158



**160049**  
AY-SET-LNS-SY05-160049



**158307**  
AY-SET-LNS-SY04-158307



**120377**  
AY-SET-LNS-SY01-120377



**125359**  
AY-SET-LNS-SY02-125359

### Lens set 5 colors

## Lens set, 5 colors

---



**120344**  
AY-SET-LNS-0001-120344



**163284**  
AY-SET-LNS-0003-163284

## Lens set, 6 colors

---



**120378**  
AY-SET-LNS-0002-120378

## Spare parts

Evaluation module and bus module MGB-L1...-PN... (guard locking by spring force) with 3 control elements, 7/8" and M12 plugs

---



**121861**  
MGB-L1B-PNA-L-121861

- ▶ Guard locking with guard lock monitoring
- ▶ Emergency stop according to ISO 13850, illuminated
- ▶ 2 illuminated pushbuttons
- ▶ including adhesive labels
- ▶ Connection via 7/8" and M12 plugs
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ Unicode

## Handle module MGB-H-...

---



**106221**  
MGB-H-AA1A2-L-106221

- ▶ Intelligent bolt tongue
- ▶ Lockout bar
- ▶ Door handle
- ▶ Mounting plate

## Contacts

🏠 EUCHNER GmbH + Co. KG  
Kohlhammerstraße 16  
70771 Leinfelden-Echterdingen

☎ +49 711 7597-0

📠 +49 711 753316

✉ info(at)euchner.de