

MGB-L0B-PNA-L-124128 (ORDER NO. 124128)

Interlocking module and bus module MGB-L0...-PN with 2 control elements, 7/8" and M12 plugs

- ▶ Locking (without guard locking)
- ▶ Emergency stop according to ISO 13850, illuminated
- ▶ 2 illuminated pushbuttons
- ▶ including adhesive labels
- ▶ Connection via 7/8" and M12 plugs
- ▶ Pre-assembled on mounting plates
- ▶ Integrated Profinet RT switch
- ▶ Unicode



Description

Profinet connection

7/8" plugs according to ANSI/B93.55M-1981 and M12 plugs (d-coded) according to IEC 61076-2-101


Profinet RT switch

Point-to-point topology network structure due to integrated RT switch.

Illuminated emergency stop

Emergency stop with illumination that can be controlled as required.

Dimension drawings

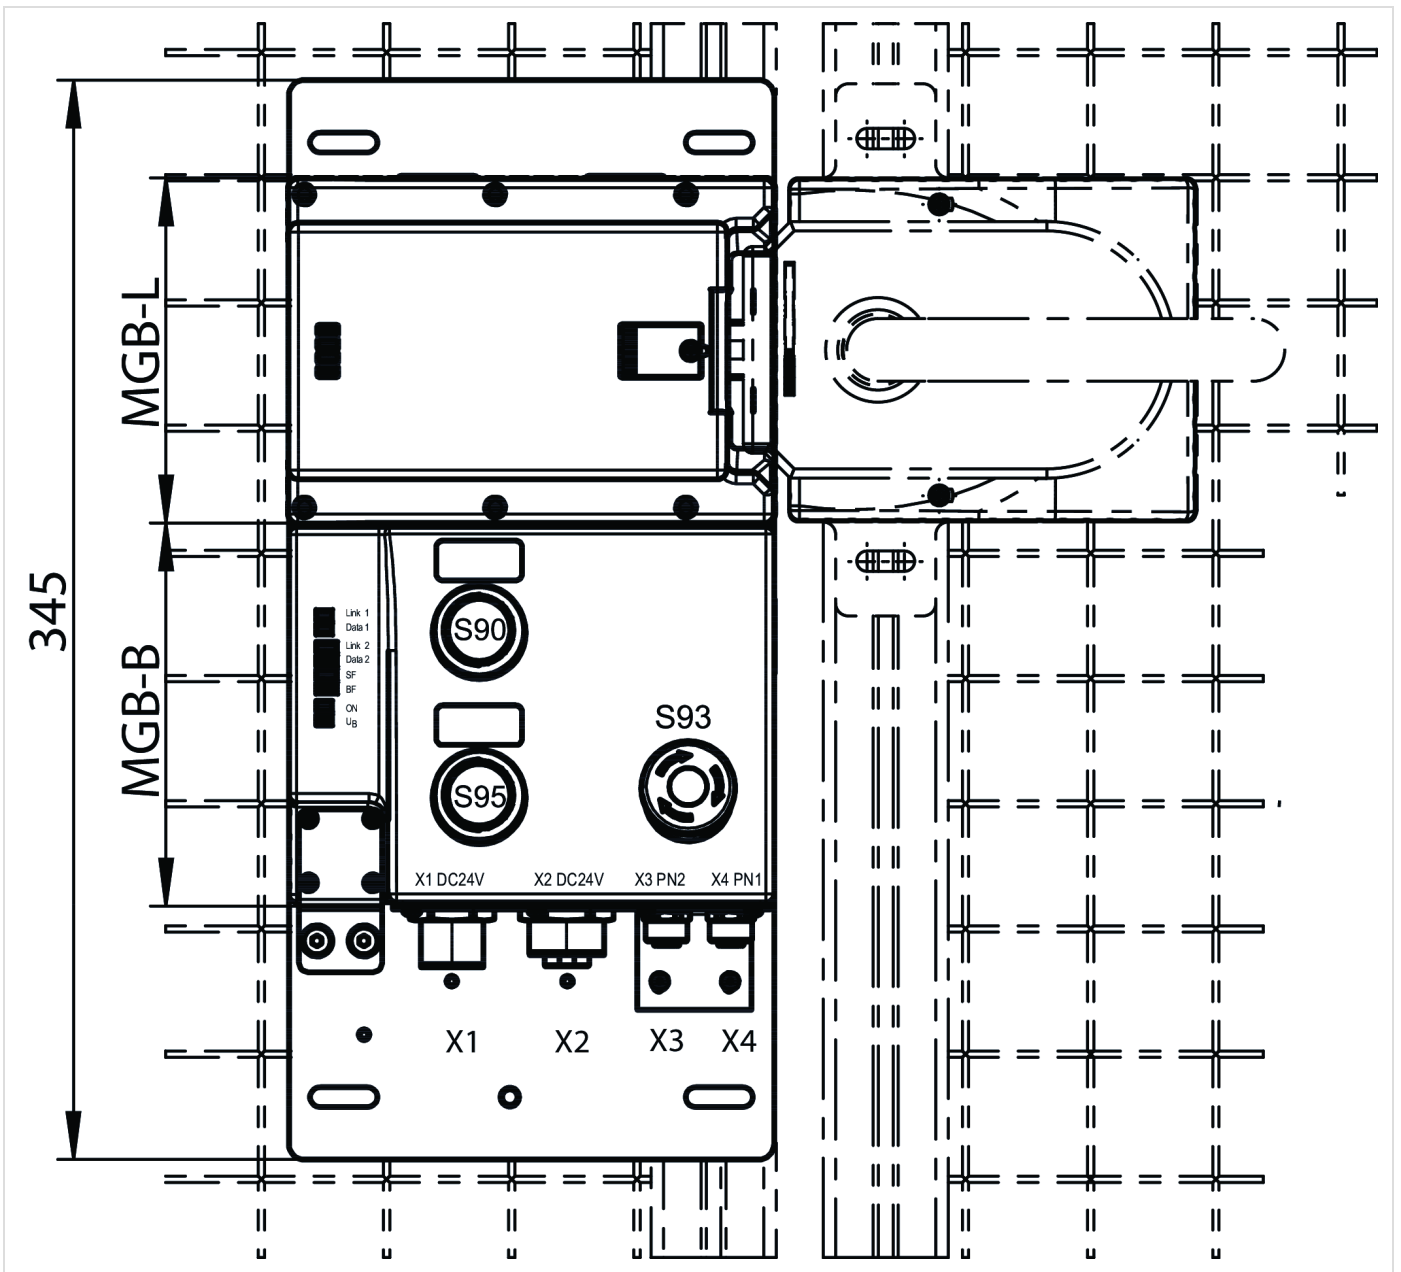

Technical data

Approvals



Work area

Assured release distance s_{ar}

Door position max. 65 mm

Controls and indicators

Assignment diagram

L0

B1

Item	Extras	Color	Designation1	Number	LED	Version	Slide-in label	Einlegeschild Anmerkung	Switching element
90						Illuminated pushbutton			1NO
93						Emergency stop illuminated			2 PD
95						Illuminated pushbutton			1NO

Electrical connection ratings

Connecting cable

	Ethernet	Profinet I/O cable, at least cat. 5e
Current consumption		max. 500 mA
Degree of contamination (external, according to EN 60947-1)		3
EMC protection requirements		In accordance with EN 61000-4 and EN 61326-3-1
maximum feed-in current in the connection block		
	X1, X2	max. 4000 mA
Rated impulse withstand voltage U_{imp}		0.5 kV
Rated insulation voltage U_i		75 V
Safety class		III
Transponder coding		Unicode
		Power supply X1
Auxiliary voltage DC		
	L2	24 V DC -15% ... +10% (The auxiliary voltage is not required for the MGB system)
Fusing		
	extern	min. 1 A träge
Operating voltage DC		
	L1	24 V DC -15% ... +10% ((verpolsicher, geregelt, Restwelligkeit <5%, PELV))
		Power supply X2
Auxiliary voltage DC		
	L2	24 V DC -15% ... +10% (For looping through for connected devices)
Operating voltage DC		
	L1	24 V DC -15% ... +10% (Zum Weiterschleifen für nachfolgende Geräte)

Mechanical values and environment

Ambient temperature

at UB = 24V DC -20 ... +55 °C

Connection

acc. to IEC 61076-2-101, Profinet I/O cable, at least cat. 5e	M12, D-coded, screened (X3 (The document PROFINET "Cabling and Interconnection Technology" from the PNO aids in the correct selection of cables.))
	7/8" Power (X1 (The document PROFINET "Cabling and Interconnection Technology" from the PNO aids in the correct selection of cables.))
acc. to IEC 61076-2-101, Profinet I/O cable, at least cat. 5e	M12, D-coded, screened (X4 (The document PROFINET "Cabling and Interconnection Technology" from the PNO aids in the correct selection of cables.))
	7/8" Power (X2 (The document PROFINET "Cabling and Interconnection Technology" from the PNO aids in the correct selection of cables.))
Degree of protection	IP54
Installation orientation	Door hinge DIN left
Material	
	Housing Fiber glass reinforced plastic, nickel-plated die-cast zinc, stainless steel
Mechanical life	
	1 x 10 ⁶
in case of use as door stop, and 1 Joule impact energy	0.1 x 10 ⁶
Reaction time	
	Door position max. 550 ms Turn-off time (The reaction time is the max. time between the change in the input status and the deletion of the corresponding bit in the bus protocol.)
	Emergency stop / machine stop max. 250 ms Turn-off time (The reaction time is the max. time between the change in the input status and the deletion of the corresponding bit in the bus protocol.)
	Bolt position max. 550 ms Turn-off time (The reaction time is the max. time between the change in the input status and the deletion of the corresponding bit in the bus protocol.)
Shock and vibration resistance	according to EN 60947-5-3
Switching frequency	0.25 Hz

Reliability values according to EN ISO 13849-1

Mission time	20 y
	Emergency stop
B10d	
	Emergency stop 0.13 x 10 ⁶
	Emergency-stop evaluation
Category	4
Performance Level	PL e
PFHd	4.1 x 10 ⁻⁸
	Monitoring of the guard position
Category	4
Diagnostic Coverage (DC)	99 %
Performance Level	PL e
PFHd	4.07 x 10 ⁻⁸ (Fixed failure rate without consideration of faults in wearing parts.)
Safety Integrity Level	SIL 3 (EN 62061:2005)

Miscellaneous

Additional feature incl. lens set ID no. 120344

Product version number V3.30.10

Slide-in label

Anzahl	Beschriftung	Anmerkung
2		ohne Aufschrift

Interface, bus

Bus data protocol Profinet (IEC 61158 type 10)

Data interface

Ethernet

Safety data protocol Profisafe (IEC 61784-3-3)

Accessories

Miscellaneous

Adhesive labels

114529
MGB-A-PLATESET-NN01-114529

- ▶ Adhesive labels suitable for MGB evaluation modules, bus modules and control modules
- ▶ silver, blank
- ▶ Packaging unit = 10 pcs.

Lens set labeled



160049
AY-SET-LNS-SY05-160049



120377
AY-SET-LNS-SY01-120377



158307
AY-SET-LNS-SY04-158307



126158
AY-SET-LNS-SY03-126158



125359
AY-SET-LNS-SY02-125359

Lens set, 5 colors



163284
AY-SET-LNS-0003-163284



120344
AY-SET-LNS-0001-120344

Lens set, 6 colors



120378
AY-SET-LNS-0002-120378

Contacts

🏠 EUCHNER GmbH + Co. KG
Kohlhammerstraße 16
70771 Leinfelden-Echterdingen

📞 +49 711 7597-0

📠 +49 711 753316

✉️ [info\(at\)euchner.de](mailto:info(at)euchner.de)