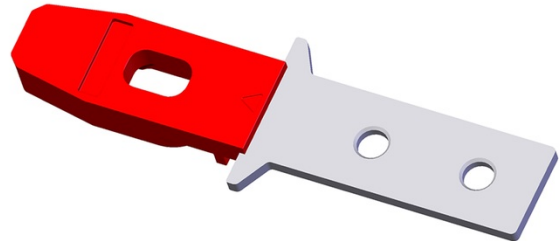

A-C-H-G-LS-EX-136826 (ORDER NO. 136826)

Straight actuator for safety switch CTP-EX, ATEX

- ▶ ATEX version
- ▶ Suitable for use in zones 2 and 22 (gases and dusts)
- ▶ Straight actuator
- ▶ Two safety screws included



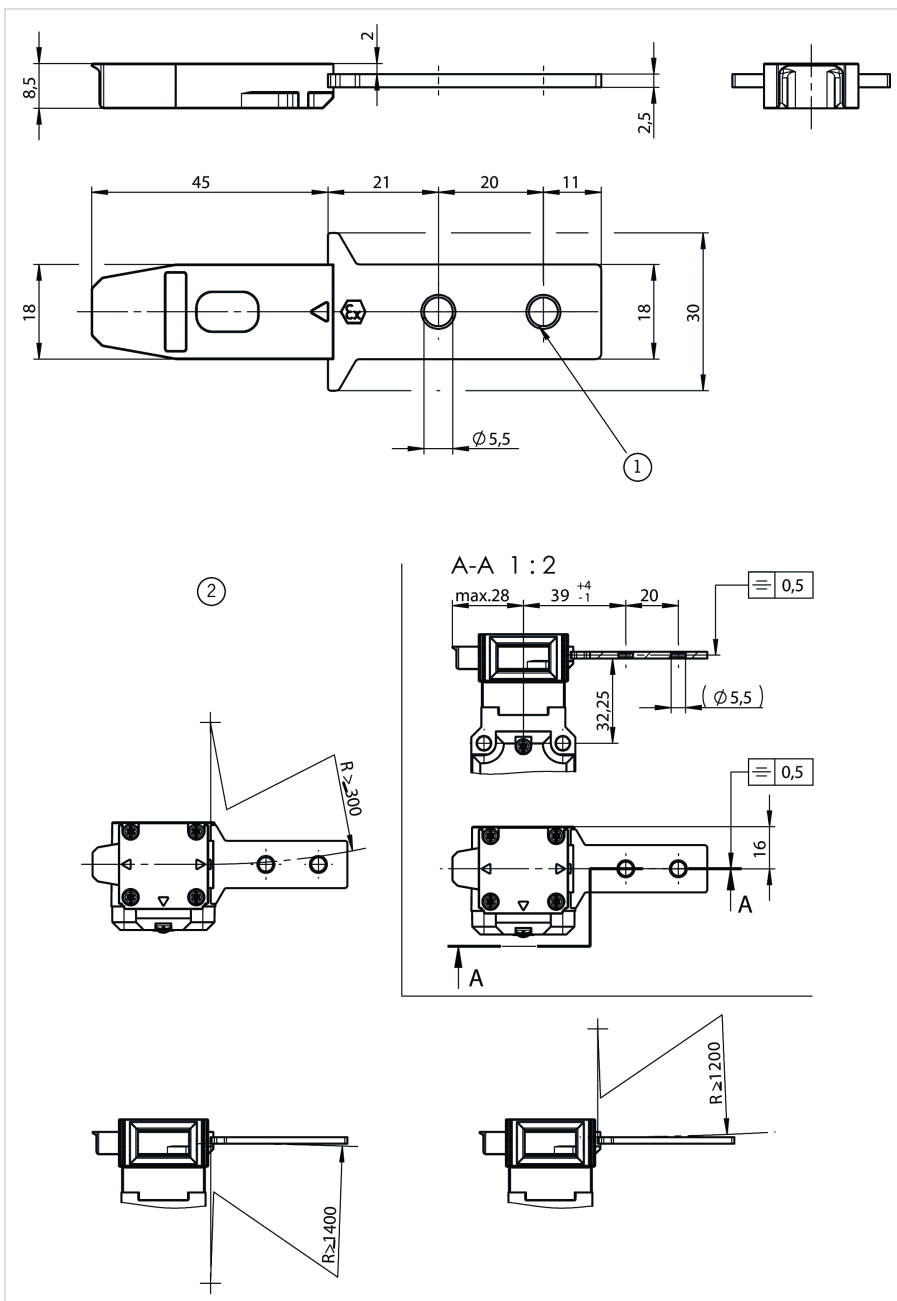
Description

Straight actuator

The straight actuator is used on sliding doors or hinged doors with door radii greater than 300 mm. Safety screws prevent unscrewing of the actuators.

The safety screws included can be inserted with a normal tool, but cannot be removed again.

Dimension drawings



1 2x non-removable screws M5 included

2 Min. door radii

Technical data

Approvals



Electrical connection ratings

Power supply

inductive via read head

Mechanical values and environment

Ambient temperature	-20 ... +55 °C
Degree of protection	IP65/IP66
Installation orientation	any
Locking force F_{max}	3900 N
Locking force F_{Zh}	3000 N ($F_{Zh} = F_{max}/1.3$)
Material	
	Encapsulation fiber reinforced plastic, red
	Mounting Stainless steel
Mechanical life	1×10^6
Overtravel	5 mm

Miscellaneous

Explosion protection	II3G Ex ic IIC T4 Gc / II3D Ex ic IIIC T110°C Dc X
----------------------	--

Accessories

Mounting accessories

Safety screws M5 x 10

073455
M5X10-NIRO/V100

- ▶ Safety screws M5 x 10
- ▶ Packaging unit 100 pieces

Contacts

🏠 EUCHNER GmbH + Co. KG
Kohlhammerstraße 16
70771 Leinfelden-Echterdingen

☎ +49 711 7597-0

📠 +49 711 753316

✉ info(at)euchner.de